

# USER GUIDE



Untuk versi bahasa Indonesia  
silahkan unduh pada website,  
[www.getaqila.com/download](http://www.getaqila.com/download)

**AQILA**  
Rumah Lebih Aman, Lebih Pintar™



# AQILA QUBECAM

Aqila Qubecam is an indoor smart camera from Aqila that can monitor all activities inside your house, day and night, directly through the Aqila Smart App.

You can view live videos with 1080p HD quality for a clear picture and can preview the video footage whenever needed. Aqila Qubecam is also equipped with a motion sensor and motion tracker to increase your alertness when there are any suspicious events.

With Aqila Qubecam, it is like you always have an eye inside your house to monitor the situation anytime, from anywhere.

# PRODUCT LIST



1 Aqila Qubecam



1 Fisher and Screws



1 Camera Bracket / Mount



1 Power Adapter




1 User Guide

# FEATURES

- Unique and modern design
- 90 ° wide angle lens
- Tilt horizontally and vertically
- Wi-Fi connectivity
- 1080 HD streaming
- Motion Detector
- Motion Tracking
- IR night vision
- Two-way audio communication
- Easily connect to the Aqila Smart App
- Supports TF memory card up to 128GB
- Cloud storage options
- Can be used as a standalone device without Aqila Securehub™

# DISPLAY

- Indicator Light
- Camera Lens
- Microphone
- Adapter port
- Reset button
- Memory card slot



---

Name	Description
Indicator Light	<ul style="list-style-type: none"><li>• Red Light: Camera On and connected to Power source.</li><li>• Red Light Blinking: Ready to connect with Aqila Smart Apps</li><li>• Green Light Blinking: Camera is not connected to Internet access.</li><li>• Green Light On: Camera is On and connected to Internet. You can view videos footage through the Aqila Smart App.</li></ul>
Reset Button	Press the reset button for 3-5 seconds to reset or restore the camera to factory settings
Memory card Slot	Camera support TF Memory card storage.

---

# QUICK USER GUIDE

## DOWNLOAD AQILA SMART



Register to create  
an Aqila account.

Run the Aqila Smart App on  
your mobile phone, then register  
according to the instructions in the  
application. You can log in if you  
already have an Aqila account.



## RESET

Press the reset button located on the back of the camera for 5-7 seconds, then release when you hear a “beep” sound indicating a successful reset.

Wait for the reboot process and internet configuration. You will hear a confirmation sound from the camera and the LED Indicator will flash quickly (2 times every second) after the camera returns to its default settings.

## LED Status Indicator

---

Blinks fast  
(2 times every  
second)

Camera is ready to  
connect and wait for  
internet configuration.

---

Blinks slowly  
(1 time every second)

Camera is  
transmitting video  
stream.

---

LED Indicator off

Camera is connected  
to Wi-Fi.

---

On for 5 Seconds


Camera is in setup  
mode.

---

# CONNECTS AQILA QUBECAM TO AQILA SMART APP WITH **SMART MODE**



1. Press the + button / icon located at the top right of the Application
2. Make sure you are in Add Manually mode
3. Select the Camera section
4. Then select Qubecam
5. Turn on the camera and make sure the LED indicator flashes quickly (2 times every second)
6. Press the connection button Connecting

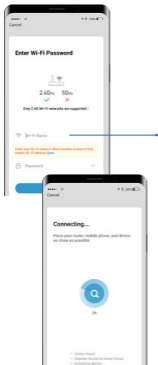

7. Enter the Wi-Fi network name and Wi-Fi Password then press the Confirm button
8. Wait to connect, make sure a close distance between the Cellphone, Wi-Fi router and the camera.
9. When the connection is successful, a confirmation sound will be heard from the camera.
10. Congratulations, your Aqila Qubecam is successfully connected, you can also change your camera name.

## CONNECTS AQILA QUBECAM TO AQILA SMART APPLICATION WITH **AP MODE (ACCESS POINT)**

1. If the connection via Smart Mode is not successful, an option will appear to repeat or use another connection method “Switch Pairing Mode”
2. Turn off the camera then turn it back on
3. Press the reset button for 5-7 seconds until the LED indicator flashes SLOWLY (1 time every second)
4. Press the “Confirm Indicator Slowly Blinking”
5. Enter your Wi-Fi network name and Wi-Fi Password then press the Confirm button

6. Then enter the Wi-Fi setting menu on your mobile phone and connect the Wi-Fi to “Smartlife-xxxx”
7. Wait to connect, make sure a close distance between the Cellphone, Wi-Fi router and the camera.
8. When the connection is successful, a confirmation sound will be heard from the camera
9. Congratulations, your Aqila Qubecam is successfully connected, you can also change your camera name.

## Basic Functions

---



Alarm Button  
(Siren Icon)

To activate or deactivate the motion sensor and adjust its sensitivity level. When activated, the camera will take a photo every time movement is detected and send notifications directly to your phone via Aqila Smart App.

---



Speak Button  
[Microphone  
Icon]

To perform 2-way audio communication with people around the camera.

---



Direction  
Button  
[Arrow Icon]

To move the camera lens to desired direction and position.

---



Record Button  
[Video icon]

To record videos while viewing videos through the application which will be saved in the app's photo album.

---




Screenshot  
Button  
[Camera Icon]

To save video footage in form of photos and will be saved in the app's photo album.



Playback  
Button  
[Video Icon]

To play back recorded video stored on the memory card. You can select the video you want to play back based on the date and time.



Note:

- This feature can only be used if you are using a memory card in your camera
- Currently, the camera only supports TF memory cards with the FAT32 system format. Formats other than FAT32 will not be identified.





Cloud Storage  
Button  
[Cloud icon]

Plays back camera footage stored on Cloud storage media. This feature is very useful if you lost or break your camera or memory card.

Note:

**You must subscribe to Aqila's VAS Cloud service to be able to use this feature.**

---



Album Button  
[Picture Icon]

To re-view videos and images from your recorded videos or screenshots.

---



Full screen view

---



To listen to or mute the sound from the area around the camera.

---

**SD/HD**

To select image quality, Standard Definition or High Definition

---



Camera Setting menu.

---

# Camera Setting

---



Pencil  
Icon

Click the icon at the top right to enter the settings section.

---



Icon  
Kamera

Select Camera Image to change Camera Icon, Name and Location

---



Device  
Information

Contains Camera technical information.

---



## Tap-to-Run & Automation

To see if the camera is used in the Tap-to-Run (Scenarios) and Automation features that you created on the Aqila Smart App.

Tap-to-Run and Automation are features in the Aqila Smart App that can run device operation commands automatically based on met and pre-set conditions. For example, the alarm on Aqila Securehub™ will sound automatically when the camera detects Movement.

---

---

## Basic Function Setting

**Flip Screen:** Change the display direction on the screen

**Time Watermark:** Display date and time on camera footage

**Talk Mode:** Communication mode on the camera. One-way communication if you want communication to be done alternately or Two-way communication if communication is carried out simultaneously.

---

## Motion Detection

**Motion Detection Alarm:** o activate or deactivate the Motion detection feature.

**Motion Tracking:** To activate the motion tracking feature or follow people movements

**Schedule:** To schedule motion detector activation.

---

## Purchase VAS

Additional services from AQILA for cloud video storage and other AQILA services.

You can subscribe to this service in accordance with the applicable terms.

---

## FAQ & Feedback

Contains information, questions and answers about the camera

---

---

## **Offline Notification**

If activated, you will receive an instant notification if the camera status is inactive.

If it is disabled, then you will only receive a notification if the camera is inactive after 30 minutes and the next notification is 8 hours later.

---

## **Share Device**

- You can provide access of this device to another AQILA account. You can also delete shared accounts and set up shared accounts as managers.
  - Press the “Add Sharing” button
  - Enter the phone number or email address of other Aqila users who will share the device with you.
  - Click “Done”
- 

## **Remove Device**

To remove camera from your Aqila account Aqila.

---



